


The Hancock Inspirator Types H N-L, L N-L and K N-L

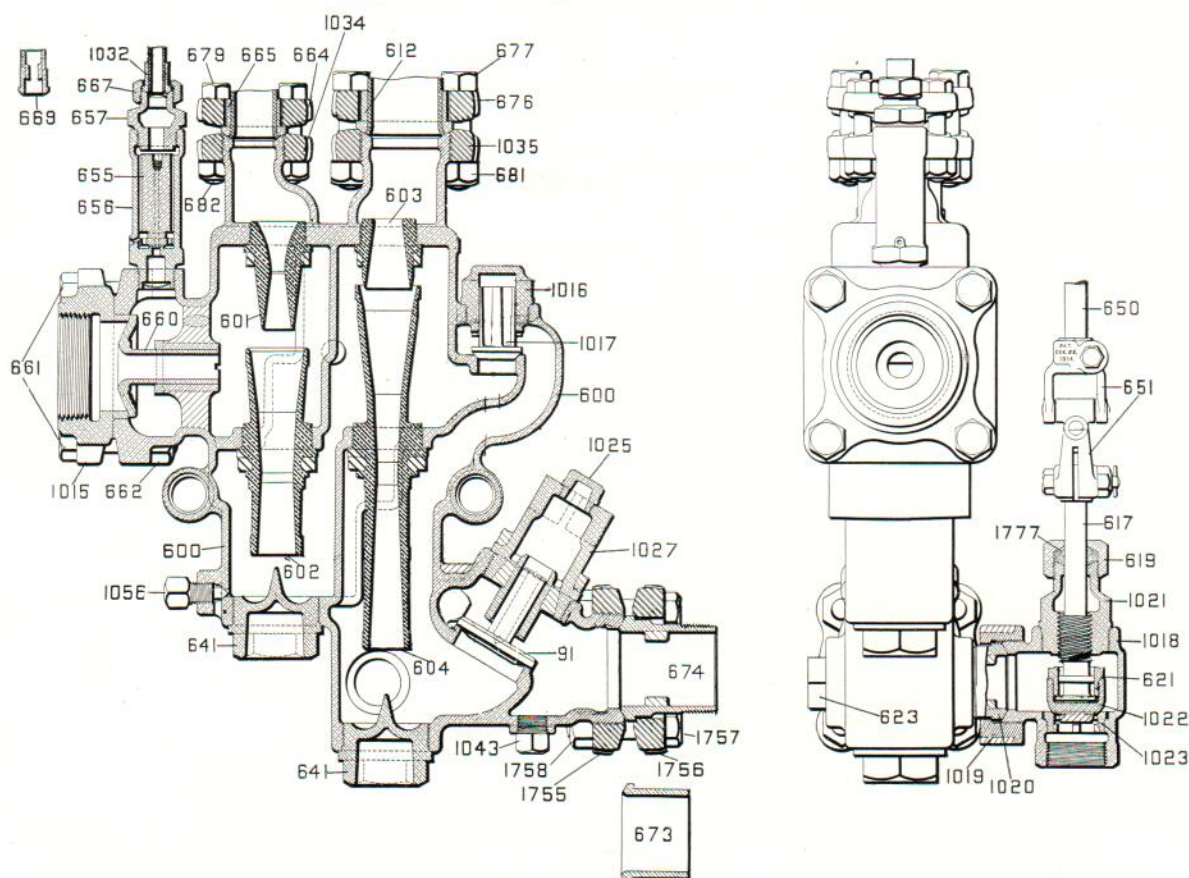

These three types are similar in design, sizes varying only to group different tube capacities in the same body. Standard maximum capacities as follows:

TYPE H N-L	TYPE L N-L	TYPE K N-L
2500 gals. per hour	6500 gals. per hour	8500 gals. per hour
3000 " " "	7000 " " "	9000 " " "
3500 " " "	7500 " " "	9500 " " "
4000 " " "	8000 " " "	10000 " " "
4500 " " "		10500 " " "
5000 " " "		11000 " " "
5500 " " "		11500 " " "
6000 " " "		12000 " " "

Minimum capacity at 200 pounds pressure, 33 per cent. of maximum given.

PIPE CONNECTIONS

	H N-L		L N-L		K N-L	
	Copper O.D.	Iron Pipe Size	Copper O.D.	Iron Pipe Size	Copper O.D.	Iron Pipe Size
Steam { Main Line	2"	Copper only	2"	Copper only	2 3/4"	Copper only
Regulating Line ..	1 1/4"	Copper only	1 1/4"	Copper only	1 3/4"	Copper only
Suction	Iron only	2 1/2"	Iron only	3"	Iron only	3 1/2"
Delivery	2 1/4"	2"	2 3/4"	2 1/2"	3 1/4"	3"
Overflow	Iron only	1 3/4"	Iron only	1 1/2"	Iron only	2"
Alarm Valve Line	1/2"	3/8"	1/2"	3/8"	1/2"	3/8"
Suction Hose not less than..	3" Inside Diam.		3 1/2" Inside Diam.		4" Inside Diam.	